


SR600MI impulser for slave clocks

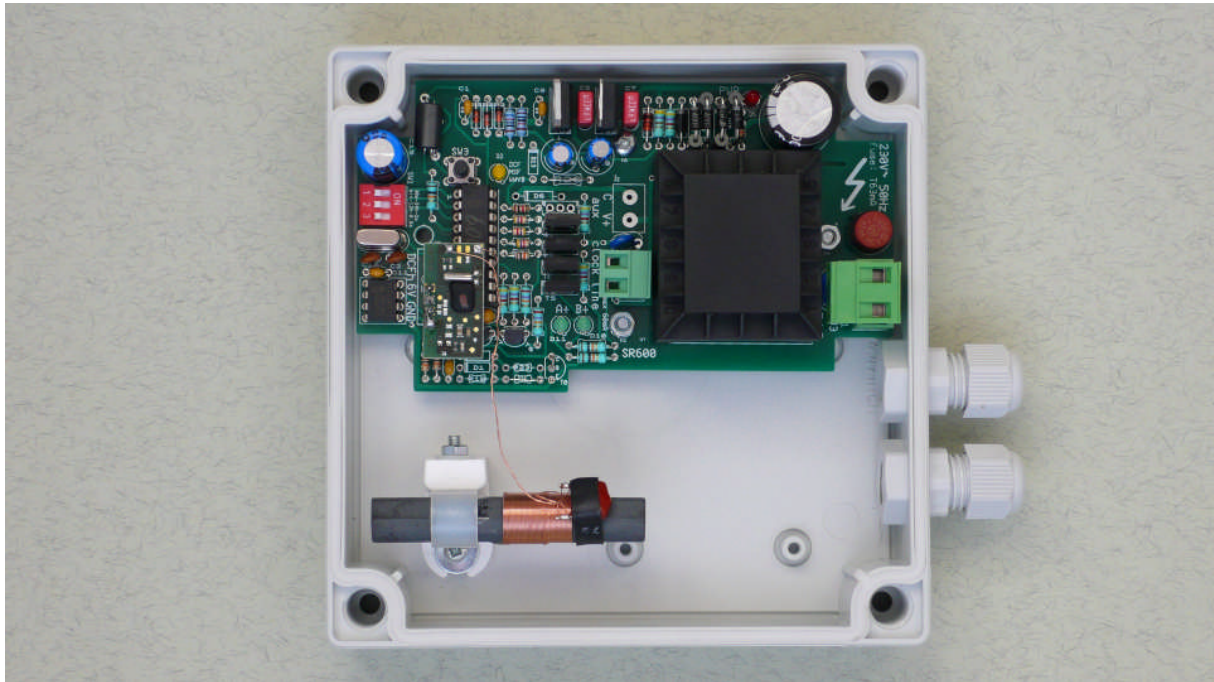

The SR600MI is an electronic master clock (impulser) for bipolar slave clocks. The combination with the internal MSF time signal receiver guarantees all connected clocks do run on time also during the summertime (DST). If the mains fails the position of the hands is saved in a memory. After the mains has been restored the hands are transported to the on time position. The memory runs without a battery!

Features

- Led indication of the MSF signal and the clock line.
- Multifunctional pushbutton for setting the clock on 12.00h (start time).
- Minute or 30 seconds impulse.
- Indication 12 or 24h.
- Impulse length 0,6 or 2 seconds.
- Selection with dip-switches.
- Input: 230V~ 50/60Hz.
- Clock line control: transistor 24V=/60mA, bipolar.
- Time correction by succeeding impulses or waiting.
- Housing: polycarbonate, with transparent cover.
- Dimension (lxbxh):130x130x50mm. With strain reliefs: + 20mm.

Option: via the auxiliary output the hour impulses (1 up to 12) and half an hour impulse. Controlling, for example a bell, via a 24V relay (not included).

[Price, pricelist SR series.](#)

Call 0031(0)10 4183689 or mail to info@radioclockcontrol.com.