


SR750WHC impulser for slave clocks

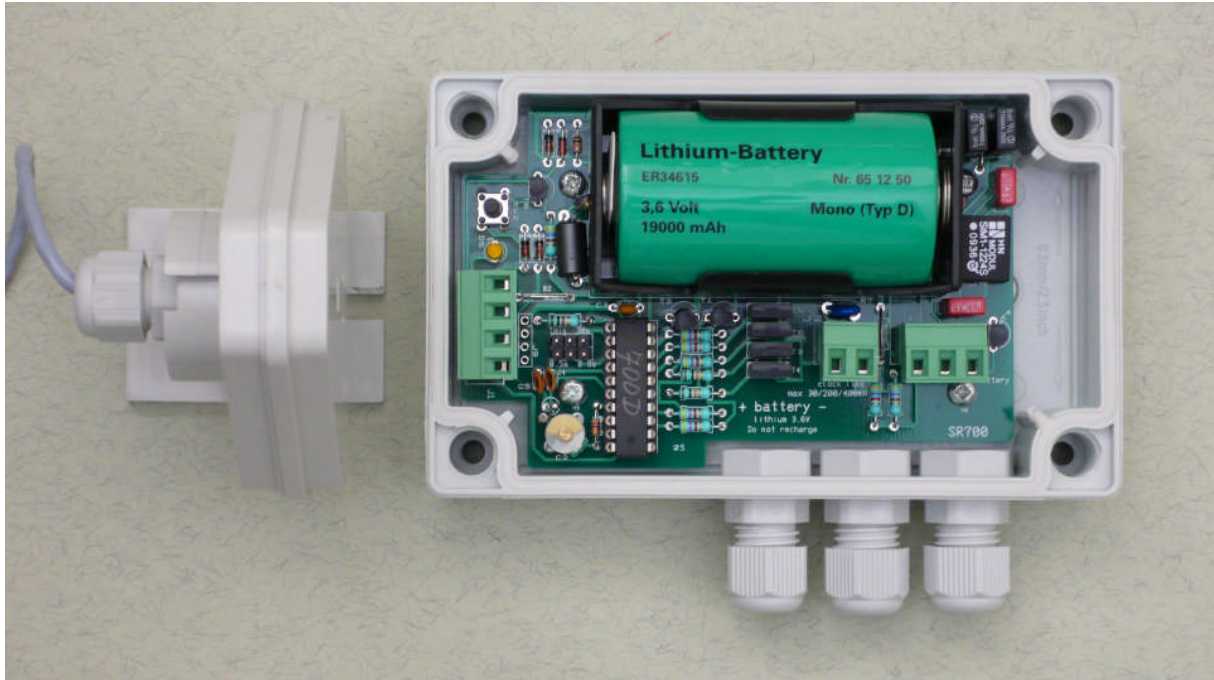

The SR750WHC is an electronic master clock (impulser) for places where no mains is available. The combination with an external WWVB time signal receiver runs the slave(s) on time also during the summertime (DST).

Features

- Led indication WWVB signal.
- Receiver active directly after the start and every day during 16 minutes from 2.00 and 14.00h.
- Multifunctional pushbutton for setting the slave on 12.00h (start time) also for setting the time sector offset.
- Minute or 30 seconds impulses.
- Impulse length: 0.5 or 0.8 seconds, modification possible when ordering.
- Time correction by succeeding impulses or waiting.
- Clock line control: transistor 24V=/ 50mA, bipolar. DC/DC 12/24V convertor.
- Supply impulser: lithium D-battery 3.6V/19000mAh, life about 8 years.
- Supply clock: separate. For example 4 lithium C-batteries 3.6V/9000mAh. Efficiency convertor 80%. Life about 8/10x 8 years, in respect with a 12V slave, minute impulses, length 0.5 seconds/10mA.
Mind the maximum constant discharge current of the batteries!
- Housing: polycarbonate, with transparent cover.
- Dimensions (lxbxh):130x80x50mm. With strain reliefs: + 20mm.

[Price, pricelist SR series.](#)

Call 0031(0)10 4183689 or mail to info@radioclockcontrol.com.